

# QTF Seal™

*High Performance Bituminous Fog Seal*

## DESCRIPTION

**QTF Seal™** is a bituminous fog seal especially designed to improve the service life of road surfaces. Fog seals are one of the most cost effective pavement preservation treatments available.

**QTF Seal™** sets quicker than conventional fog seals which means less interruption to traffic. Normally roads are open to traffic within 40 minutes\*.

**QTF Seal™** leaves the road blacker longer than a conventional fog seal, providing extended UVR protection to the paved surface. A blacker pavement also helps a road look new longer to the driving public.

\*Weather conditions can play a factor in return traffic time.

## FEATURES/BENEFITS

- Delineates Driving Lanes
- Rapid breaking
- Economical
- Provides long lasting black surface.
- Reduces raveling
- Provides water resistant seal
- Ideal for all asphalt paving surfaces

## APPLICATION

Optimum application of **QTF Seal™** occurs when the ground temperature is above 50°F (10°C) and rising. **QTF Seal™** can be applied in high humidity but this will prolong the break time. Vehicular traffic should be kept off the treated area until emulsion is cured. Ensure **QTF Seal™** emulsion is protected from frost. Prior to application, **QTF Seal™** should be homogenized thoroughly. The surface to be sprayed should be free of all loose material and standing water. It must be spray applied by using a suitable calibrated distributor & experienced personnel.

## SPECIFICATIONS – TECHNICAL DATA

### QTF Seal™


<u>Emulsion Tests</u>	<u>Specification</u>	<u>Typical Results</u>
Viscosity, SFS @ 25°C, sec	< 100	25 - 50
Sieve, %	< 0.10	≤0.10
Residue by distillation, %	< 50.0	40
Pen, dmm	< 90.0	45 - 60
Demulsibility, %	> 60.0	80 - 90

### Product Handling Guidelines

- Emulsion must **not** be blended with other emulsions.
- Direct contact heat should only be done when absolutely necessary. This should be done sporadically and with recirculation or agitation if possible. Note: Emulsion which directly contacts any heat source above 210°F will experience break and separation.
- Emulsion separation will occur if frozen or boiled.
- Rapid Set Fog Seals are highly unstable and should not be held in storage to the next day.

## APPLICATION RECOMMENDATIONS

**QTF Seal™** should be applied between 0.05 and 0.20 gallons/SY depending on the texture, porosity etc. of the surface and at temperatures 160° - 180°F (71° - 82°C).

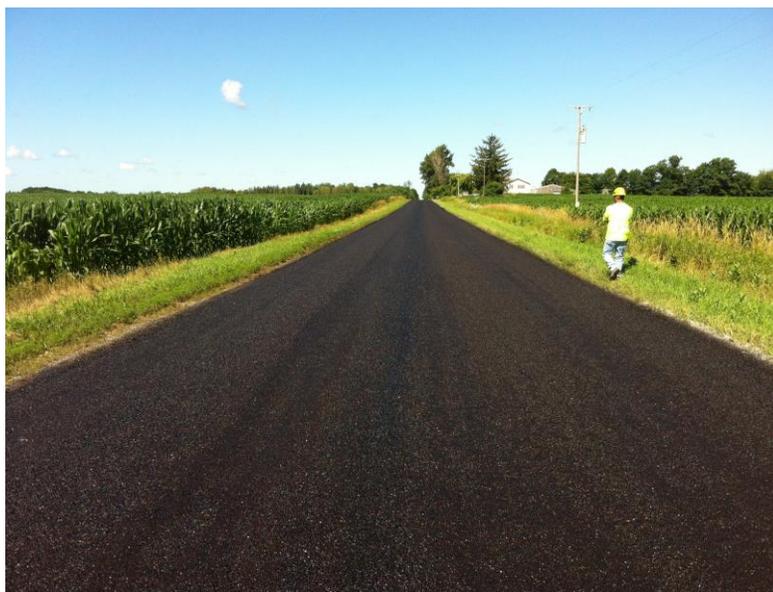

**AWARD WINNING ASPHALT PAVING & SUPPLY SINCE 1959**

Michigan Paving & Materials Co.

1950 Williams St.  
Alma, MI 48801

Tel: 989-402-5932



Michigan Paving & Materials Co.

3125 E Front Street  
Monroe, MI 48161

Tel: 734-241-9189